


| | | |
|-----|-----|-----|
| Ra | 0.2 | JIS |
| 1.6 | ▽▽▽ | |
| 6.3 | ▽▽ | |
| 25 | ▽ | |
| ◎ | ~ | |

| | | |
|------|----------|-------------------|
| ±0.1 | 0.5~5 | GENERAL TOLERANCE |
| ±0.2 | 6~30 | |
| ±0.3 | 31~120 | |
| ±0.5 | 121~320 | |
| ±0.8 | 321~1000 | |

HAITIMA CORPORATION
 P.O.BOX 34-36 TAIPEI
 Tel:+886-2-26585800
 E-mail:haitima@seed.net.tw
 www.haitima.com.tw
 TAIWAN R.O.C.
 Fax:+886-2-26582266

PART C

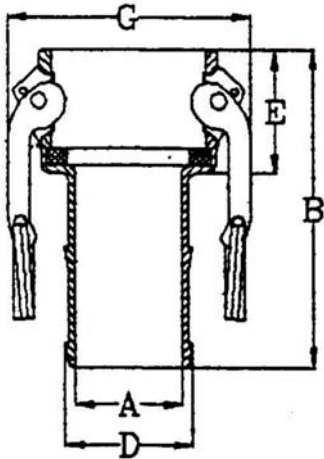

| Size | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" | 6" |
|-------------------|------|------|------|--------|--------|--------|--------|--------|-------|--------|
| Size of Thread | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | 2-1/2" | 3" | 4" | 6" |
| G: Max O.D. | 45.7 | 53.3 | 60.9 | 82.6 | 90.3 | 99.8 | 112.4 | 137.6 | 165.6 | 238.3 |
| B: Overall Length | 87 | 82.8 | 96.2 | 102.5 | 104 | 120.57 | 142.3 | 159.12 | 163.5 | 227.87 |
| E: Exposed Length | 31.4 | 32 | 39 | 44.5 | 45 | 50 | 54.3 | 55.5 | 55.5 | 65.5 |
| A: Min. I.D. | 7.7 | 13.8 | 19.8 | 25.9 | 32.3 | 44.5 | 56.7 | 68 | 93.4 | 144.8 |
| D: Shank O.D. | 14.6 | 21 | 27 | 33.7 | 40.1 | 52.7 | 66.3 | 79 | 104.4 | 156.8 |

unit:mm



HAITIMA CORPORATION

| | | | | |
|----------|--------------|-------------|---------------|----------------------------------|
| CHECK BY | DRAWING BY | DATE | SPECIFICATION | Cam & Groove Couplers & Adapters |
| | <i>Sammy</i> | Apr.21.2014 | MATERIAL | SS 316 |
| | | | PROCESS/Nr. | |
| | | | UNIT / SCALE | mm |

| | | | |
|--------------------------|-------------|------------|---------|
| | | | |
| | | | |
| | | | |
| Revise | Description | Date | Approve |
| DRAWING NO. FK-05 | | -14 | |